


DISTANCE SENSORS

LSM4

- Micro-Vu Measuring Systems are equipped and ready to incorporate laser triangulation sensors.
- Available specular and diffuse modes configurations.
- Collects data as it moves between two programmed XYZ locations, ideal for surfaces' flatness and Z distance measurements.
- The LSM4-10 and LSM4-2 are supported by the Vertex 261, 34X, Excel 51X, 70X, 130X, 170X and 2500 models.

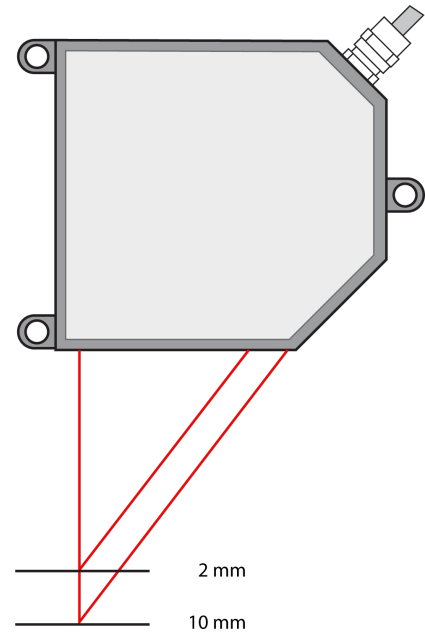

Technical Specifications

	LSM4-10	LSM4-2
Modes	Diffuse, Specular	Diffuse, Specular
Range [mm]	10	2
Working Distance [mm]	35	25
Spot Size [μm]	32 x 45	\emptyset 23
Resolution* [μm]	0.15	0.03

*Resolution depends on the material surface.
Spot Size at mid of measuring range.

LSM4-10:


Offers a comfortable working distance and measurement range, which makes this sensor suitable for measurements of a variety of parts.

LSM4-2:

Capable of doing higher accuracy measurements.
Has a small diametrical spot size which benefits small feature measurements.

VAS-500

Vertical Axial Scanner

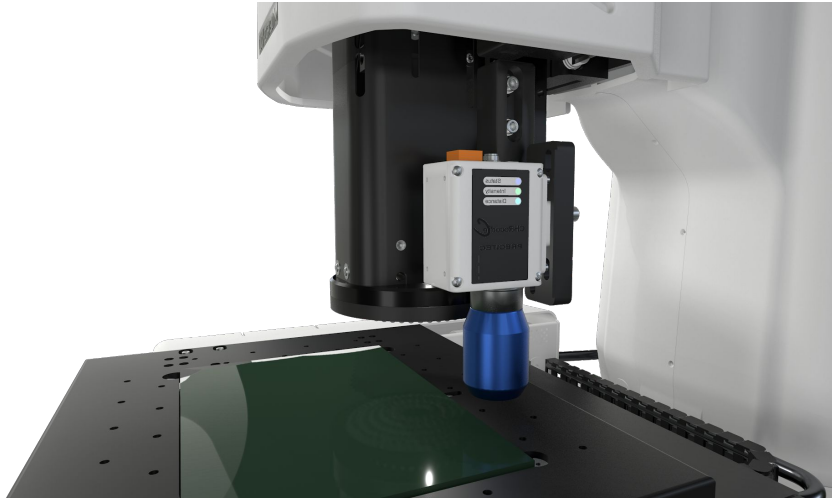

- Micro-Vu Measuring Systems are equipped and ready to incorporate the Vertical Axial Scanner.
- Available with a measurement range of 500 μm and working distance of 12.7 mm.
- Collects data as it moves between two programmed X,Y, Z locations, ideal for surfaces' flatness and Z distance measurements.
- The VAS-500 is supported by the Vertex 261, 341, 342, Excel 511, 701, 901, 1301, 1701 and 2500 models.
- Small spot size, ideal for measuring surfaces such as glass, polished metal, ceramic and coatings.
- Includes an automated calibration process in InSpec Metrology Software.

Technical Specifications

Measurement range [μm]	500
Working distance [mm]	12.7
Resolution on axis [nm]	20
Spot size [μm]	5
Max slope angle (mirror surface) [$^{\circ}$]	45

www.microvu.com | 7909 Conde Lane. Windsor, California 95492

Product information is subject to change without prior notice as a result of ongoing technical development.